

Single ovens

All our stainless steel ovens are now anti-fingerprint.

Model	EOC69400	EOC68000	EOC65140	EOB63100	EOB66714	EOB63000
Fuel	Electric	Electric	Electric	Electric	Electric	Electric
side opening						
Oven Functions						
Ultrafan fan operated cooking	•	•	•	•	•	•
Turbo-grilling	•	•	•	•	•	•
Conventional cooking	•	•	•	•	•	•
Pizza setting	•	•	•		•	
Fan controlled defrosting	•	•		•	•	•
Slow cook	•	•			•	
Keep warm	•	•			•	
Full width electric grill	•		•	•		•
Economy electric grill	•	•	•	•	•	•
Base heat finishing and reheating	•	•	•	•	•	
Top heat					•	
Oven Features						
Oven door(s) (Q=quadruple T=triple, D=double)	Q	Q	T	T	T	T
Interior lights Watts	65	40	40	25	25	25
Interior lights	2	1	1	1	1	1
Light bar	•	•	•	•	•	
Baking chart	•	•	•	•		•
Touch control	•	•			•	
Digital display	•	•				
Digital temperature control	•	•	•		•	
Pop in-pop out controls			•	•		
Rotary controls						•
Compact hinge	•	•	•	•	•	•
Cooling fan	•	•	•	•	•	•
Smell control filter	•	•			•	
Easy installation - side handles and stability feet	•	•	•	•	•	•
Programmer						
Fully programmable electronic timer	•	•	•	•	•	•
Mechanical minute minder	•	•	•	•	•	•
Electronic minute minder	•	•	•	•	•	•
Digital controls with menu guided cooking	•	•			•	
Cleaning						
Pyroluxe oven cleaning ⁽¹⁾	•	•	•		•	
Catalytic lining/liners				•	•	
New bright diamond glazed enamel interior				•	•	•
Fold down grill				•	•	•
Removable inner door glasses	•	•	•	•	•	•
Equipment Supplied						
Telescopic runners					2 levels	
Chrome grid runners	•	•	•	•	•	•
Chrome auto-stop non-tip shelves	2	2	•	2	2	2
Grill/Meat pan - non stick	•	•				
Grill/Meat pan	•	•	•	•	•	•
Meat probe		•				
Internal Oven Dimensions						
Volume (usage) litres	50	50	50	50	54	50
Height (mm)	310	310	310	310	335	310
Width (mm)	400	400	400	400	395	400
Depth (mm)	407	407	407	407	410	407
Energy Information						
Oven temperature range (°C)	30-300	30-300	50-275	50-275	30-300	50-275
Energy class	A	A	A	A	A	A
Energy consumption static kW	0.91	0.89	0.90	0.79	0.79	0.90
Energy consumption fan kW	0.79	0.79	0.79	0.79	0.79	0.79
Standby power W	1	1	1.7	1		1
Electrical Connection						
Connected load kW	3.5	3.5	3.5	3	2.5	3
Fuse rating A	16	16	16	13	13	13
Oven/Grill power (max) kW	3.5/2.9	3.5/2.9	3.5/2.9	3.0/2.9	2.5/1.65	3.0/2.9
Appliance Dimensions						
Height (mm - A)	594	594	594	594	590	594
Width (mm - B)	594	594	594	594	594	594
Depth (mm - C)	567	567	567	567	560	567
Net weight (Kg)	43	41.5	36	34.5	36.5	34
Aperture Dimensions						
Height (In-column) (mm - D)	590	590	590	590	580	590
Height (Under-counter) (mm - E)	590	590	590	590	580	590
Width (mm - F)	560	560	560	560	560	560
Depth (mm - G)	550	550	550	550	550	550
Packaging Dimensions						
Height (mm)	700	700	700	700	660	700
Width (mm)	660	660	660	660	630	660
Depth (mm)	710	710	710	710	670	710
Gross weight (Kg)	47	45.5	40	38.5	38	38
Safety and Interference Suppression						
Low Voltage Directive (LVD)	•	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•	•
Literature Supplied						
Operation and installation instructions	•	•	•	•	•	•
Colour Options						
Stainless steel	EOC69400X	EOC68000X	EOC65140X	EOB63100X	EOB66714X	EOB63000X
White				EOB63100K		EOB63000W

(1) Pyroluxe cleaning: 5.0kWh

Single ovens

All our stainless steel ovens are now anti-fingerprint.

Model	EOB53000	EOB51000	EOG10000*
Fuel	Electric	Electric	Gas
side opening			
Oven Functions			
Ultrafan fan operated cooking	•	•	Gas
Turbo-grilling			
Conventional cooking			
Pizza setting			
Fan controlled defrosting	•	•	
Keep warm			
Full width electric grill	•	•	
Economy electric grill			Gas grill
Base heat finishing and reheating			
Top heat			
Oven Features			
Oven door(s) (Q=quadruple T=triple, D=double)	D	D	D
Interior lights Watts	25	25	25
Interior lights	1	1	1
Light bar			
Baking chart			
Touch control			
Digital display			
Digital temperature control			
Pop in-pop out controls			
Rotary controls	•	•	•
Compact hinge	•	•	•
Cooling fan	•	•	•
Smell control filter			
Easy installation - side handles and stability feet	•	•	•
Programmer			
Fully programmable electronic timer	•		
Mechanical minute minder		•	•
Electronic minute minder	•		
Digital controls with menu guided cooking			
Cleaning			
Pyroluxe oven cleaning ⁽¹⁾			
Catalytic lining/liners			
New bright diamond glazed enamel interior	•	•	•
Fold down grill	•	•	
Removable inner door glasses	•	•	•
Equipment Supplied			
Telescopic runners	•	•	•
Chrome grid runners			
Chrome auto-stop non-tip shelves	2	2	2
Grill/Meat pan - non stick			
Grill/Meat	•	•	•
Meat probe			
Internal Oven Dimensions			
Volume (usage) litres	50	50	53
Height (mm)	310	310	305
Width (mm)	400	400	465
Depth (mm)	407	407	437
Energy Information			
Oven temperature range (°C)	50-275	50-275	
Energy class	A	A	N/A
Energy consumption static kW	N/A	N/A	N/A
Energy consumption fan kW	0.79	0.79	N/A
Standby power W	1	1	N/A
Electrical Connection			
Connected load kW	3	3	1.7
Fuse rating A	13	13	13
Oven/Grill power (max) kW	3.0/2.9	3.0/2.9	1.7/1.65
Appliance Dimensions			
Height (mm - A)	594	594	597
Width (mm - B)	594	594	596
Depth (mm - C)	567	567	565
Net weight (Kg)	30	31.5	31.2
Aperture Dimensions			
Height (In-column) (mm - D)	590	590	580
Height (Under-counter) (mm - E)	590	590	580
Width (mm - F)	560	560	560
Depth (mm - G)	550	550	550
Packaging Dimensions			
Height (mm)	700	700	660
Width (mm)	660	660	630
Depth (mm)	710	710	670
Gross weight (Kg)	34	35.5	32.7
Safety and Interference Suppression			
Low Voltage Directive (LVD)	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•
Literature Supplied			
Operation and installation instructions	•	•	•
Colour Options			
Stainless steel	EOB53000X	EOB51000X	EOG10000X
White	EOB53000W	EOB51000W	
Black	EOB53000K		

* This model has safety gas thermocouples. Suitable for apartments and multi-occupancy dwellings.

Double ovens

All our stainless steel ovens are now anti-fingerprint.

Model	EOD68043	EOD67043	EOD43103	EOD33003
Oven Functions (t = top - m = main)	t m	t m	t m	t m
Ultrafan fan operated cooking	• •	• •	•	•
Fan controlled defrosting	• •	• •	•	•
Conventional cooking	• •	• •	• •	•
Turbo-grilling	• •	•	•	
Pizza setting	• •	•	•	
Top heat finishing and reheating			•	•
Base heat finishing and reheating	• •	• •	• •	•
Slow cook	• •	•		
Keep warm	• •	• •		
Full width electric grill	• •	• •	• •	•
Economy electric grill	• •	• •	• •	•
Oven features				
Oven door(s) (Q = quadruple T = triple, D = double)	T	T	D	D
Interior lights (Watts)	2x25 H	1x25 H / 1x50	2x25 H	2x25 H
Interior lights Position	Back/Side	Back/Side	Back/Back	Back/Back
Digital touch controls with menu guided cooking	•			
Digital temperature control	•	•		
Push button controls		•		
Pop in-pop out controls			•	
Rotary controls				•
Compact hinge	•	•	•	•
Cooling fan	•	•	•	•
Programmer				
Fully programmable electronic timer	•	•	•	•
Cleaning				
Catalytic lining/liners	•	•	•	
Cat refresh	•	•	•	
Diamond glazed enamel interior				•
Removable inner door glasses	•	•	•	•
Equipment Supplied				
Chrome grid runners	•	•	•	•
Chrome auto-stop non-tip shelves	•	•	•	•
Grill/Meat pan	•	•	•	•
Internal Oven Dim. (s=secondary/m=main)				
Volume (usage) (litres)	35 56	35 56	37 56	37 56
Height (mm)	208 338	208 338	208 338	208 338
Width (mm)	400 400	400 400	400 400	400 400
Depth (mm)	415 415	415 415	441 415	441 415
Energy Information (s=secondary/m=main)				
Energy class	A A	A A	A A	A A
Energy consumption static (kWh)	0.87 0.92	0.87 0.92	0.79 0.88	0.79 NA
Energy consumption fan (kWh)	0.79 0.79	0.79 0.79	NA 0.79	NA 0.79
Standby power (W)	1.4 1.4	0.6 0.6	1.3 1.3	1 1
Electrical connection				
Connected load (kW)	5.7	5.3	5.3	4.3
Fuse rating (A)	30	30	30	30
Oven power (max) kWh	2.38 3.0	2.38 3.0	2.35 3.0	2.35 1.98
Grill power (max) kWh	2.3 2.9	2.3 2.9	2.3 2.9	2.3 NA
Appliance Dimensions				
Height (mm - A)	888	888	888	888
Width (mm - B)	594	594	594	594
Depth (mm - C)	548	548	548	548
Net weight (Kg)	53	53	53	53
Aperture Dimensions				
Height (In column) (mm - D)	875	875	875	875
Width (mm - F)	560	560	560	560
Depth (mm - G)	550	550	550	550
Packaging Dimensions				
Height (mm)	965	965	965	965
Width (mm)	660	660	660	660
Depth (mm)	705	705	705	705
Gross weight (Kg)	55	55	55	55
Safety and interference suppression				
Low Voltage Directive (LVD)	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•
Literature supplied				
Operation and installation instructions	•	•	•	•
Colour				
Stainless steel	EOD68043X	EOD67043X	EOD43103X	EOD33003X
Black		EOD67043K	EOD43103K	EOD33003K
White			EOD43103W	EOD33003W

Under-counter ovens

All our stainless steel ovens are now anti-fingerprint.

Model	EOU63143	EOU43003	EOU33003
Oven Functions (t = top - m = main)	t m	t m	t m
Ultrafan fan operated cooking	• •	•	•
Fan controlled defrosting	• •	•	•
Conventional cooking	• •	•	•
Turbo-grilling	• •		
Pizza setting	• •		
Top heat finishing and reheating		•	•
Base heat finishing and reheating	• •	•	•
Full width electric grill	• •	•	•
Economy electric grill	• •	•	•
Oven features			
Oven door(s) (Q = quadruple T = triple, D = double)	T	D	D
Interior lights (Watts)	2x25 H	2x25 H	2x25 H
Interior lights Position	Side/Back	Back/Back	Back/Back
Digital display			
Digital controls with menu guided cooking			
Digital temperature control			
Pop in-pop out controls	•		
Rotary controls			•
Compact hinge	•	•	•
Cooling fan	•	•	•
Programmer			
Fully programmable electronic timer	•	•	•
Cleaning			
Catalytic lining/liners	•	•	
Cat refresh	•	•	
Diamond glazed enamel interior			•
Removable inner door glasses	•	•	•
Equipment Supplied			
Chrome grid runners	•	•	•
Chrome auto-stop non-tip shelves	•	•	•
Grill/Meat pan	•	•	•
Internal Oven Dim. (s=secondary/m=main)			
Volume (usage) (litres)	35 40	37 40	37 40
Height (mm)	208 243	208 243	208 243
Width (mm)	400 400	400 400	400 400
Depth (mm)	415 415	441 415	441 415
Energy Information (s=secondary/m=main)			
Energy class	A A	A A	A A
Energy consumption static (kWh)	0.89 0.79	0.79 NA	0.79 NA
Energy consumption fan (kWh)	0.79 0.79	NA 0.79	NA 0.79
Standby power (W)	1.3 1.3	1.3 1.3	1.3 1.3
Electrical connection			
Connected load (kW)	5.7	4.3	4.3
Fuse rating (A)	30	30	30
Oven power (max) kWh	2.78 2.98	2.35 1.98	2.35 1.98
Grill power (max) kWh	2.3 2.9	2.3 NA	2.3 NA
Appliance Dimensions			
Height (mm - A)	715	715	715
Width (mm - B)	594	594	594
Depth (mm - C)	548	548	548
Net weight (Kg)	50	44	48
Aperture Dimensions			
Height (In column) (mm - D)	870	870	870
Width (mm - F)	600	600	600
Depth (mm - G)	560	560	560
Packaging Dimensions			
Height (mm)	805	805	805
Width (mm)	660	660	660
Depth (mm)	705	705	705
Gross weight (Kg)	54	49	50
Safety and interference suppression			
Low Voltage Directive (LVD)	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•
Literature supplied			
Operation and installation instructions	•	•	•
Colour			
Stainless steel	EOU63143X	EOU43003X	EOU33003X
Black		EOU43003K	
White		EOU43003W	

Microwaves

All our stainless steel ovens are now anti-fingerprint.

Model	EMC38915	EMS26415	EMS17216
Cooking modes			
Microwave oven	•	•	•
Combination microwave and fan oven	•		
Combination microwave and grill	•	•	
Fan cooking - Ultrafan®	•		
Grill and fan oven combined	•		
Grill only	•	•	
Microwave features			
Power levels	5	5	5
Maximum microwave output	1000	900	800
Quickstart	•	•	•
Fan Oven Features			
Maximum convection output	1600		
Convection temperatures	50 to 200		
Grill features			
Maximum grill output	1500	1000	
Quartz grill		•	
Drop down grill	•		
Preset programmes			
Defrost by weight	4	7	7
Cook (or dual cook) by weight	4	8	7
Reheat by weight	4		
Timers			
Electronic clock with 12 and or 24 hour display	24	12	12
90 minute/cook grill timer	•	•	
Ease of use			
Capacity (Gross)	38	26	17
LED display	•	•	•
Digital touch controls	•		
Push button controls		•	•
Bright oven light	•	•	•
Drop down oven door	•		
Push button door opening		•	•
Oven door handle	•		
Glass turntable	•	•	•
Programme end signal	•	•	•
Child lock	•	•	•
Fully Built-in, easy to install	•	•	•
Technical			
Connected load (w)	3400	2400	1200
Fuse rating	15	13	13
Plug fitted		•	•
Product dimensions			
Product height (mm)	455	459	371
Product width (mm)	594	594	594
Product depth (mm)	542	437	316
Net weight	35.0	18.5	15.5
Oven dimensions			
Internal height (Gross)	220	207	202
Internal width (Gross)	430	342	285
Internal depth (Gross)	400	368	298
Built-in dimensions			
Built-in height (mm)	450	450	360
Built-in width (mm)	560	560	560
Built-in depth (mm)	550	500	300
Packaging dimensions			
Height (mm)	535	525	475
Width (mm)	680	660	684
Depth (mm)	660	535	418
Gross weight	38.0	21.5	18.0
Colour options			
Anti-fingerprint Stainless steel	EMC38915X	EMS26415X	EMS17216X
White		EMS26415W	
Black		EMS26415K	

Compact ovens

All our stainless steel ovens are now anti-fingerprint.

Model	EOK86030X	EOK66030X
Fuel	Electric	Electric
Oven functions		
Ultrafan® fan operated cooking	•	•
Fan controlled defrosting	•	•
Turbo-grilling	•	•
Variable Grill	•	•
Low Temperature fan cooking		•
Microwave with 5 power levels	•	
Microwave & Grill	•	
Microwave & Ultrafan® cooking	•	
Auto defrost by weight	•	
Auto cook by weight	•	
Oven features		
Oven door(s) (Q=quadruple T=triple D=double)	Q	Q
Interior lights watts	25	25
Light bar	•	•
Digital Touch Control	•	•
Digital Display	•	•
Digital Temperature Control	•	•
Compact hinge	•	•
Cooling Fan	•	•
Fully programmable electronic timer	•	•
Electronic minute minder	•	•
Catalytic lining/liners		Roof
Bright diamond glazed enamel interior	•	•
Equipment supplied		
Chrome grid runners	•	•
Chrome auto-stop non-tip shelves	•	•
Grill/meat pan	•	•
Glass bottom	•	
Internal oven dimensions		
Volume (usage) litres	31	31
Height mm	205	205
Width mm	400	400
Depth mm	378	378
Energy information		
Oven temperature range °C	30-250	30-250
Energy class		B
Energy consumption fan kWh		0.79
Standby power W	1.2	1.2
Electrical connection		
Connected load kW	3.7	3.7
Fuse rating A	16	16
Oven/Grill power (max) kW	1.65/1.5	1.65/1.5
Appliance dimensions		
Height mm	388	388
Width mm	594	594
Depth mm	567	567
Net Weight kg	43	27.5
Aperture dimensions		
Height mm	380	380
Width mm	560	560
Depth mm	550	550
Packaging dimensions		
Height mm	480	480
Width mm	670	670
Depth mm	720	720
Gross Weight kg	46.5	31
Safety and interference suppression		
Low Voltage Directive (LVD)	•	•
Electromagnetic Compatibility (EMC)	•	•
Literature supplied		
Operation and installation instructions	•	•

Built-in TV

Our stainless steel TV and coffee machine are now anti-fingerprint.

Model	ETV45000X	Model	EBA60010X	PKD6070M
Technical data				
TV Screen Type	LCD		Coffee machine	Accessory drawer
Decorframe	Anti-finger print stainless steel			
Installation Kit	•	Technical data		
Connected Load (kW)	60	Connected load (kW)	1.15	
Fuse Rating (A)	13	Fuse Rating (A)	13	
Cord Length	1.6	Lamp	Halogen	
Plug Fitted	•	Working Pressure (Bar)	16	
TV dimensions		Product dimensions		
Screen Size (inches)	19	Product Height (mm)	378	70
Product Height (mm)	356	Product Width (mm)	594	592
Product Width (mm)	516	Product Depth (mm)	380	502
Product Depth (mm)	80	Net Weight (kg)	22.5	9.6
Net Weight (kg)	10.4	Built-in dimensions		
Decorframe dimensions		Built-in Height (mm)	380	70
Product Height (mm)	460	Built-in Width (mm)	560	560
Product Width (mm)	594	Built-in Depth (mm)	550	550
Product Depth (mm)	20	Packaging dimensions		
Built-in dimensions		Height (mm)	465	160
Height (mm)	446	Width (mm)	670	630
Width (mm)	560	Depth (mm)	605	585
Depth (mm)	350	Gross Weight (kg)	25.0	10.2
Packaging dimensions				
Height (mm)	330			
Width (mm)	780			
Depth (mm)	485			
Gross Weight (kg)	13.6			

Coffee machine

Gas hobs

Model	EHG90932	EHG75932	EHG9832	EHG7822	EHG6832	EHT6432	EHG641
Hob Features							
Number of cooking zones	6	5	6	5	4	4	4
Knobs position	Front middle	Front middle	Front middle	Front middle	Front middle	Right side	Front middle
Integrated ignition in knob	•	•	•	•	•	•	•
Gas safety (thermocouples)	•	•	•	•	•	•	•
No of pan supports	3	2	3	3	2	4	2
Cast Iron pan supports	•	•	•	•	•		
Enamelled pan support							•
Zone specification							
Front left spec 1)	Rapid	Semi rapid	Rapid	Semi rapid	Semi rapid	Rapid	Semi rapid
Front left rating 1) (kW)	3.0	2.0	3.0	2.0	2.0	2.9	2.0
Front left diameter (mm)	100	70	100	70	70	98	62
Front right spec 1)	Dual Defendi	Auxiliary	Triple Crown	Auxiliary	Auxiliary	Auxiliary	Auxiliary
Front right rating 1) (kW)	5.0	1.0	4.0	1.0	1.0	1.0	1.0
Front right diameter (mm)	134	54	122	54	54	48	48
Rear left spec 1)	Auxiliary	Semi rapid	Auxiliary	Semi rapid	Semi rapid	Semi rapid	Semi rapid
Rear left rating 1) (kW)	1.0	2.0	1.0	2.0	2.0	1.9	2.0
Rear left diameter (mm)	54	70	54	70	70	62	62
Rear right spec 1)	Auxiliary	Rapid	Auxiliary	Rapid	Triple Crown	Semi rapid	Rapid
Rear right rating 1) (kW)	1.0	3.0	1.0	3.0	4.0	1.9	3.0
Rear right diameter (mm)	54	100	54	100	122	62	62
Front middle spec 1)	Semi rapid		Semi rapid				
Front middle rating 1) (kW)	2.0		2.0				
Front middle diameter (mm)	70		70				
Rear middle spec 1)	Semi rapid	Duel Defendi	Semi rapid	Triple Crown			
Rear middle rating 1) (kW)	2.0	5.0	2.0	4.0			
Rear middle diameter (mm)	70	134	70	122			
Total rating (max.) 1) (kW)	14	13	13.0	12.0	9.0	7.7	8.0
Electrical connection							
Voltage (V)	230	230	230	230	230	230/240	230
Fuse rating (A)	13	13	13	13	13	13	13
Cord supplied	•	•	•	•	•	•	•
Gas replacement kit LPG	•	•	•	•	•	•	•
Appliance Dimensions							
Height (above worktop) (mm)	18	18	15	15	15	8	8
Width (mm - A)	894	744	894	744	594	580	594
Depth (mm - B)	510	510	510	510	510	510	510
Net weight (kg)	17.3	15.3	19.1	15.5	12.9	12.4	8.7
Aperture Dimensions							
Height (mm - C)	30	30	30	30	30	40	30
Width (mm - D)	830	560	830	560	560	550	560
Depth (mm - E)	480	480	480	480	480	470	480
Packaging Dimensions							
Packaged height (mm)	160	170	150	170	170	150	170
Packaged width (mm)	1020	880	985	880	685	640	685
Packaged depth (mm)	620	640	620	620	620	620	620
Gross weight (kg)	18.0	16.0	19.8	16.2	13.5	13.0	9.3
Safety and interference suppression							
Low Voltage Directive (LVD)	•	•	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•	•	•
Gas Directive	•	•	•	•	•	•	•
Literature supplied							
Operation and installation instructions	•	•	•	•	•	•	•
Colour Options							
Stainless steel	EHG90932X	EHG75932X	EHG9832X	EHG7822X	EHG6832X		EHG641X
White						EHT6432W	EHG641W
Brown							
Black						EHT6432K	EHG641K

1) For gas conversion purpose 3.450 BTU = 1kW

Warming drawers

All our stainless steel warming drawers are now anti-fingerprint.

Model	EED14600X*	EED21600X*	EED29600X*
Functions			
Cups & Glasses Warming 40°C	•	•	•
Crockery Warming 60°C	•	•	•
Food Warming 80°C (Maximum)	•	•	•
Defrosting 30°C (Minimum)	•	•	•
Oven features			
Heating Element	•	•	•
Fan Air Circulation	•	•	•
Rotary Control Knob	•	•	•
Variable Temperature Control	•	•	•
On/Off LED	•	•	•
Equipment supplied			
Anti-slip mat	•	•	•
Energy information			
Oven temperature range (°C)	30-85	30-85	30-85
Electrical connection			
Connected load (kW)	0.43	0.55	0.55
Fuse rating (A)	13	13	13
Safety and interference suppression			
Low Voltage Directive (LVD)	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•
Literature supplied			
Operation and installation instructions	•	•	•
Appliance dimensions			
Height (mm)	140	215	295
Width (mm)	594	594	594
Depth (mm)	535	535	535
Net weight (kg)	18	24	27
Aperture dimensions			
Height (mm)	145	215	295
Width (mm)	560	560	560
Depth (mm)	550	550	550
Packaging dimensions			
Height (mm)	250	300	380
Width (mm)	645	645	648
Depth (mm)	670	670	670
Gross weight (kg)	20.3	26.4	29.6

* Food must be a minimum of 80°C prior to placing in the warming drawer.

Ceramic and electric hobs

Model	EHD72100	EHD60020	EHS60210	EHS60021	EHP60060	EHP60040
Hob Features						
Number of cooking zones	4	4	4	4	4	4
Control position	Front	Front right	Front right	Front right	Right side	Right side
Control type	Touch	Touch	Touch	Touch	Rotary	Rotary
Residual heat/hob on indicators	•	•	•	•	•	•
Electronic timer	•	•	•			
Child lock	•	•	•	•		
Function lock	•	•	•			
Auto cutoff	•	•	•	•	•	•
No of booster zones	4	2				
Stop + Go function	•		•			
Automatic heat up	•					
Pot sensors	•	•				
Zone specification						
Front left spec 1)	Induction booster	Induction booster	Triple Rapid power zone	Rapid power zone	Dual Rapid power zone	Rapid power zone
Front left rating (kW)	1.45/1.8	2.2/3.7	0.8/1.6/2.3	2.3	0.75/2.2	1.8
Front left diameter (mm)	145	210	120/175/210	210	120/210	180
Front right spec 1)	Induction booster	Induction booster	Rapid power zone	Rapid power zone	Rapid power zone	Rapid power zone
Front right rating (kW)	2.3/3.7	1.8/2.8	1.2	1.2	1.2	1.2
Front right diameter (mm)	210	180	145	145	145	145
Rear left spec 1)	Induction booster	Induction	Rapid power zone	Rapid power zone	Rapid power zone	Rapid power zone
Rear left rating (kW)	1.85/2.5	1.4	1.2	1.2	1.2	1.2
Rear left diameter (mm)	180	140	145	145	145	145
Rear right spec 1)	Induction booster	Induction	Dual Rapid power zone	Rapid power zone	Rapid power zone	Rapid power zone
Rear right rating (kW)	1.45/1.8	1.8	1.5/2.4	1.8	1.8	1.8
Rear right diameter (mm)	145	180	170/265	180	180	180
Electrical connection						
Total rating (max.) (kW)	7.4	7.4	7.1	6.5	6.4	6
Fuse rating (A)	30	30	30	30	30	30
Appliance Dimensions (1)						
Height (above worktop) (mm)	4	4	4	4	4	4
Width (mm - A)	720	590	590	576	576	576
Depth (mm - B)	520	520	520	516	516	516
Net weight (Kg)	11.2	11.0	7.7	7.3	7.6	7.4
Aperture Dimensions						
Height (mm - C)	58	51	43	43	43	43
Width (mm - D)	700	560	560	560	560	560
Depth (mm - E)	490	490	490	490	490	490
Packaging Dimensions						
Packaged height (mm)	165	115	115	118	118	118
Packaged width (mm)	788	745	680	678	678	678
Packaged depth (mm)	575	575	575	600	600	600
Gross weight (Kg)	12	12.2	9.1	8.1	8.4	8.3
Safety and interference suppression						
Low Voltage Directive (LVD)	•	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•	•
Cord supplied	•					
Literature supplied						
Operation and installation instructions	•	•	•	•	•	•
Colour Options						
Frameless with silver look	EHD72100X					
Bevelled (2 sides)		EHD60020P	EHS60210P			
Stainless steel frame					EHP60060X	
Black frame				EHS60021K	EHP60060K	EHP60040K

1) For installation aperture dimensions see installation instructions
* Hob height: is height above worktop only

Cooker hoods

Model	EFC90680X	EFC9430X	EFC9441X	EFC6441X
Specification				
Number of motors	1	1	1	1
Fan speeds	4	4	4	4
Control Type	Touch Control	Touch Control	Rotary	Rotary
Intensive setting	•	•	•	•
Hob illumination (H= Halogen) (Watts)	5 x 20 H	1 x 24 PL	5 x 20 H	4 x 20 H
Extraction/recirculation operation	• •	• •	• •	• •
Saturation indication				
Metal grease filter(s)	4	1	1	1
Switch Off Delay		•		
Installation height from				
Electric hob (mm)	450	300	400	400
Gas hob (mm)	650	300	400*	400
Performance data				
Extraction ca.m³/h (max)	500	450	450	450
Extraction ca.m³/h (intensive)	640	540	540	540
Recirculation ca.m³/h (max)	420	360	385	385
Recirculation ca.m³/h (intensive)	500	403	450	450
Noise (max. setting) extraction (dB(A))	59.3	60.7	58.3	58.3
Recirculation Noise (max. setting) (dB(A))	67.6	69.0	68.2	68.2
Additional equipment required:				
For ducting: Ventilation hose and wall box	•	•	•	•
Ventilation hose diameter (mm)	150	150	150	150
For recirculation: Charcoal Filter (optional accessory)	Included	Included	Included	Included
Electrical connection				
Connected load (Watts)	278	199	275	255
Fuse rating (A)	13	13	13	13
Appliance dimensions				
Height for extraction mm*	360	800	650	650
Height for recirculation mm	360	800	650	650
Width (mm)	898	760	898	598
Depth (mm)	310	354	304	304
Net Weight (Kg)	18	25.8	21.3	18.7
Packaging dimensions				
Height (mm)	430	900	428	430
Width (mm)	880	460	1001	880
Depth (mm)	720	888	880	720
Gross Weight (Kg)	24	33.8	31.4	24.6
Safety and interference suppression				
Low Voltage Directive (LVD)	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•
Literature supplied				
Operation and installation instructions	•	•	•	•

Model	EFC90673X	EFC9540X	EFC7540X	EFC6540X
Specification				
Number of motors	1	1	1	1
Fan speeds	4	4	4	4
Control Type	Touch Control	Touch Control	Touch Control	Touch Control
Intensive setting	•	•	•	•
Hob illumination (H= Halogen) (Watts)	3 x 20 H	3 x 20 H	2 x 20 H	2 x 20 H
Extraction/recirculation operation	• •	• •	• •	• •
Saturation indication				
Metal grease filter(s)	2	3	2	2
Switch Off Delay		Intensive only	Intensive only	Intensive only
Installation height from:				
Electric hob (mm)	500	650	650	650
Gas hob (mm)	650	650	650	650
Performance data				
Extraction ca.m³/h (max)	530	480	480	480
Extraction ca.m³/h (intensive)	650	550	550	550
Recirculation ca.m³/h (max)	340	330	330	330
Recirculation ca.m³/h (intensive)	400	360	360	360
Noise (max. setting) extraction (dB(A))	56.8	67.0	67.0	67.0
Recirculation Noise (max. setting) (dB(A))	67.1	66.0	66.0	66.0
Additional equipment required:				
For ducting: Ventilation hose and wall box	•	•	•	•
Ventilation hose diameter (mm)	150	150	150	150
For recirculation: Charcoal Filter (optional accessory)	Included	Included	Included	Included
Electrical connection				
Connected load (Watts)	241	265	245	245
Fuse rating (A)	13	13	13	13
Appliance dimensions				
Height for extraction mm*	730-1160	670-1000	670-1000	670-1000
Height for recirculation mm	845-1260	730-1060	730-1060	730-1060
Width (mm)	898	898	698	598
Depth (mm)	450	490	490	490
Net Weight (Kg)	30.8	20.5	19.0	18.3
Packaging dimensions				
Height (mm)	630	645	645	645
Width (mm)	980	1275	775	775
Depth (mm)	610	405	405	405
Gross Weight (Kg)	38.9	26.1	24.6	23.9
Safety and interference suppression				
Low Voltage Directive (LVD)	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•
Literature supplied				
Operation and installation instructions	•	•	•	•

* Minimum distance above a 90cm gas hob is 550mm

Cooker hoods

Model	EFC90244X	EFC60244X	EFC70710X	EFA90950X	EFC90950X
Specification					
Number of motors	1	1	1	1	1
Fan speeds	3	3	3	4	4
Control Type	Push button	Push button	Push button	Push button	Push button
Intensive setting				•	•
Hob illumination (H= Halogen) (Watts)	2 x 20 H	2 x 20 H	2 x 40 H	4 x 20 H	2 x 20 H
Extraction/recirculation operation	• •	• •	• •	• •	• •
Saturation indication				•	•
Metal grease filter(s)	3	2	2	2	2
Switch Off Delay				Intensive only	Intensive only
Installation height from					
Electric hob (mm)	500	500	650	650	650
Gas hob (mm)	650	650	650	650	650
Performance data					
Extraction ca.m³/h (max)	375	375	390	460	460
Extraction ca.m³/h (intensive)				550	550
Recirculation ca.m³/h (max)	225	225	290	320	320
Recirculation ca.m³/h (intensive)				360	360
Noise (max. setting) extraction (dB(A)	61.8	61.8	61.0	62.0	62.0
Recirculation Noise (max. setting) (dB(A)	68.0	68.0	60.0	67.0	61.0
Additional equipment required:					
For ducting: Ventilation hose and wall box	•	•	•	•	•
Ventilation hose diameter (mm)	150	150	150	150	150
For recirculation: Charcoal Filter (optional accessory)	Included	Included	EFF72	EFF72	EFF72
Electrical connection					
Connected load (Watts)	160	160	230	285	245
Fuse rating (A)	13	13	13	13	13
Appliance dimensions					
Height for extraction mm*	682-1152	682-1152	678-878	880-1060	940-1270
Height for recirculation mm	699-1152	699-1152	678-878	880-1120	815-1970
Width (mm)	898	598	698	898	898
Depth (mm)	450	450	520	650	490
Net Weight (Kg)	13.8	11.2	19.4	33.5	17.6
Packaging dimensions					
Height (mm)	570	570	775	990	975
Width (mm)	980	680	405	760	405
Depth (mm)	515	515	645	525	645
Gross Weight (Kg)	18.7	15.8	23.7	43.0	23.6
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•
Literature supplied					
Operation and installation instructions	•	•	•	•	•
Model	EFC90700X	EFC70700X	EFC90001	EFC70001	EFC60001
Specification					
Number of motors	1	1	1	1	1
Fan speeds	3	3	3	3	3
Control Type	Push button	Push button	Slider	Slider	Slider
Intensive setting					
Hob illumination (H= Halogen) (Watts)	2 x 20 H	2 x 20 H	2 x 40 W	2 x 40 W	2 x 40 W
Extraction/recirculation operation	• •	• •	• •	• •	• •
Saturation indication					
Metal grease filter(s)	2	2	3	2	2
Switch Off Delay					
Installation height from:					
Electric hob (mm)	600	600	650	650	650
Gas hob (mm)	700	650	650	650	650
Performance data					
Extraction ca.m3/h (max)	400	400	400	400	400
Extraction ca.m3/h (intensive)					
Recirculation ca.m3/h (max)	320	320	300	300	300
Recirculation ca.m3/h (intensive)					
Noise (max. setting) extraction (dB(A)	62	62.0	61.0	61.0	61.0
Recirculation Noise (max. setting) (dB(A)	64	64.0	60.0	60.0	60.0
Additional equipment required:					
For ducting: Ventilation hose and wall box	•	•	•	•	•
Ventilation hose diameter (mm)	150	150	150	150	150
For recirculation: Charcoal Filter (optional accessory)	TYPE160	TYPE160	EFF62	EFF62	EFF62
Electrical connection					
Connected load (Watts)	210	210	230	230	230
Fuse rating (A)	13	13	13	13	13
Appliance dimensions					
Height for extraction mm*	750-1165	750-1165	670-925	670-925	970-925
Height for recirculation mm	750-1165	750-1165	670-925	670-925	970-925
Width (mm)	900	700	898	698	598
Depth (mm)	505	505	502	502	502
Net Weight (Kg)	19.5	15.7	12.6	11.2	11.2
Packaging dimensions					
Height (mm)	630	585	645	645	645
Width (mm)	980	815	980	680	680
Depth (mm)	650	440	410	410	410
Gross Weight (Kg)	23	19.5	17.2	14.2	14.2
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•
Literature supplied					
Operation and installation instructions	•	•	•	•	•

Cooker hoods

Model	EFP60032X	EFG70023S	EFG50022S	EFG50021S	EF160013S
Specification					
Number of motors	1	1	1	1	2
Fan speeds	3	3	3	3	Continuous
Control Type	Slider	Slider	Slider	Slider	Slider
Intensive setting					
Hob illumination (H= Halogen) (Watts)	2 x 40 W	2 x 40 W	2 x 40 W	2 x 40 W	2 x 40 W
Extraction/recirculation operation	• •	• •	• •	• •	• •
Saturation indication					
Metal grease filter(s)	2	1	2	1 paper	2
Switch Off Delay					
Installation height from					
Electric hob (mm)	500	650	650	650	500
Gas hob (mm)	650	650	650	650	700
Performance data					
Extraction ca.m³/h (max)	280	530	290	250	450
Extraction ca.m³/h (intensive)					
Recirculation ca.m³/h (max)	230	350	230	210	290
Recirculation ca.m³/h (intensive)					
Noise (max. setting) extraction (dB(A)	63	68	64.0	61.0	65.6
Recirculation Noise (max. setting) (dB(A)	62	67	63.0	60.0	69.6
Additional equipment required:					
For ducting: Ventilation hose and wall box	•	•	•	•	•
Ventilation hose diameter (mm)	120	150	120	120	120
For recirculation: Charcoal Filter (optional accessory)	EFF70	EFF70	EFF70	EFF70	TYPE29
Electrical connection					
Connected load (Watts)	215	285	215	195	380
Fuse rating (A)	13	13	13	13	13
Appliance dimensions					
Height for extraction mm*	175	305	204	204	400
Height for recirculation mm	175	305	204	204	400
Width (mm)	598	702	522	522	598
Depth (mm)	280	284	284	284	270
Net Weight (Kg)	7.6	6.6	4.8	4.8	10.8
Packaging dimensions					
Height (mm)	255	400	290	290	330
Width (mm)	660	770	605	605	473
Depth (mm)	360	350	370	370	621
Gross Weight (Kg)	8.7	9.3	5.8	5.8	12
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•
Literature supplied					
Operation and installation instructions	•	•	•	•	•
Model	EF160012S	EF160011S	EFT60003X	EFT60004X/W/K	
Specification					
Number of motors	1	1	1	1	
Fan speeds	3	3	3	3	
Control Type	Slider	Slider	Slider	Slider	
Intensive setting					
Hob illumination (H= Halogen) (Watts)	2 x 40 W	2 x 40 W	2 x 40 W	1 x 40 W	
Extraction/recirculation operation	• •	• •	• •	• •	
Saturation indication					
Metal grease filter(s)	2	1 paper	2	1 paper	
Switch Off Delay					
Installation height from					
Electric hob (mm)	500	500	650	650	
Gas hob (mm)	700	700	650	650	
Performance data					
Extraction ca.m³/h (max)	295	210	220	170	
Extraction ca.m³/h (intensive)					
Recirculation ca.m³/h (max)	130	110	190	150	
Recirculation ca.m³/h (intensive)					
Noise (max. setting) extraction (dB(A)	65.4	57.7	64	59.0	
Recirculation Noise (max. setting) (dB(A)	67.0	61.8	63	58.0	
Additional equipment required:					
For ducting: Ventilation hose and wall box	•	•	•	•	
Ventilation hose diameter (mm)	100	100	120	120	
For recirculation: Charcoal Filter (optional accessory)	TYPE29	TYPE29	EFF57	EFF57	
Electrical connection					
Connected load (Watts)	220	230	220	135	
Fuse rating (A)	13	13	13	13	
Appliance dimensions					
Height for extraction mm*	400	400	150	150	
Height for recirculation mm	400	400	150	150	
Width (mm)	598	598	598	598	
Depth (mm)	270	270	487	482	
Net Weight (Kg)	9.1	9.3	7.2	7.2	
Packaging dimensions					
Height (mm)	330	550	645	645	
Width (mm)	473	720	205	205	
Depth (mm)	621	395	545	545	
Gross Weight (Kg)	10.7	10.5	8.2	8.2	
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	
Electromagnetic Compatibility (EMC)	•	•	•	•	
Literature supplied					
Operation and installation instructions	•	•	•	•	

Freestanding ovens

Model	EKM10760X	EKM10460X	EKM90460X	EKM90450X	EKM70150X
Fuel Type	Dual Fuel	Dual Fuel	Dual Fuel	Dual Fuel	Dual Fuel
OVEN FUNCTIONS (L=left, R=right)	L R	L R	L R	L R	L R
Ultrafan fan operated cooking	•	•	•	•	•
Fan controlled defrosting	•	•	•	•	
Conventional cooking	• •	• •	• •	•	•
Turbo grilling	•	•	•	•	
Electric grill	• •	• •	• •	•	•
Top heat finishing and reheating	• •	• •	•		
Base heat finishing and reheating	• •	• •	•	•	
Hob					
Type (Natural Gas)	6 Burner Gas Hob	5 Burner Gas Hob	5 Burner Gas Hob	5 Burner Gas Hob	5 Burner Gas Hob
Cooking Zones					
Left front (A)	Triple crown	Rapid	Rapid	Rapid	Rapid
Front left rating kWh	3.3	3	3	3	3.2
Front left diameter mm	130	100	100	100	98
Left rear (B)	Semi-rapid	Semi-rapid	Semi-rapid	Semi-rapid	Semi-rapid
Rear left rating kWh	1.8	1.75	1.75	1.75	2
Rear left diameter mm	75	75	75	75	62
Middle front (C)	Semi-rapid	Triple crown	Triple crown	Triple crown	
Front middle rating kWh	1.8	3.3	3.3	3.8	
Front middle diameter mm	75	130	130	130	
Middle rear (D)	Triple crown				Triple crown
Rear middle rating kWh	3.3				4
Rear middle diameter mm	130				126
Right front (E)	Auxiliary	Auxiliary	Auxiliary	Auxiliary	Auxiliary
Front right rating kWh	1	1	1	1	1
Front right diameter mm	60	60	60	55	48
Right rear (F)	Rapid	Semi-rapid	Semi-rapid	Semi-rapid	Semi-rapid
Rear right rating kWh	2.9	1.75	1.75	1.75	2
Rear right diameter mm	100	75	75	75	62
Individual hob flame safety device	•	•	•	•	•
Pan Supports	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
Wok stand	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
Control Type	Rotary	Rotary	Rotary	Rotary	Rotary
Ignition Type	Integral	Integral	Integral	Integral	Integral
Oven Features					
Cavities	Double	Double	Double	Single	Single
Programmer	•	•	•	•	
Minute Minder with End Cook	•	•	•	•	•
Electronic Clock	•	•	•	•	
Oven Lining	Catalytic	Catalytic	Catalytic	Enamel	Enamel
Oven Light	•	•	•	•	•
Viewing Window	•	•	•	•	•
Oven door(s)	Triple Glazed	Triple Glazed	Double Glazed	Double Glazed	Double Glazed
Cooling fan	•	•	•	•	•
Chrome grid runners	•	•	•	•	•
Chrome auto-stop non-tip shelves	•	•	•	•	•
Grill/Meat pan	•	•	•	•	•
Electrical Connection					
Voltage	230	230/240	230/240	230	230
Frequency	50	50	50	50	50
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•
Appliance Dimension					
Width cm	100	100	90	90	70
Height cm	90	90	90	87	90
Depth cm	60	60	60	60	60
Energy Label Top oven / Main oven	BB	BB	BB	C	A
Packaging Dimensions					
Height mm	1110	1145	1145	870	940
Width mm	960	1065	1065	955	716
Depth mm	750	750	750	677	770
Gross weight Kg	149	113	113	90.6	62

Freestanding ovens

Model	EKT6045X	EKC6049X	EKC6047 / EKC6046	EKC6045 / EKC6044	EKC5545 / EKC5544
Fuel Type	Electric	Electric	Electric	Electric	Electric
OVEN FUNCTIONS (T=top, M=main)	T M	T M	T M	T M	T M
Ultrafan fan operated cooking	•	•	•	•	•
Fan controlled defrosting	•	•	•	•	•
Conventional cooking	• •	• •	•	•	•
Full width/dual circuit electric grill	• •	•	•	•	•
Economy electric grill	• •	•			
Top heat finishing and reheating	•				
Base heat finishing and reheating		•			
Low temp cooking	•				
Turbo grilling	•	•			
Pizza setting	•	•			
Hob					
Type	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
Cooking Zones					
Left front (A)	Triple circuit	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic
Front left rating kWh	2.1/1.5/0.6	2.2/1.0	1.8	1.8	1.8
Front left diameter mm	210	210/140	180	180	180
Left rear (B)	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic
Front left rating kWh	1.2	1.2	1.2	1.2	1.2
Front left diameter mm	140	140	140	140	140
Right front (E)	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic
Front left rating kWh	1.2	1.7/0.7	1.2	1.2	1.2
Front left diameter mm	140	180/120	140	140	140
Right rear (F)	Dual circuit	Fast ceramic	Fast ceramic	Fast ceramic	Fast ceramic
Front left rating kWh	1.7/0.7	1.8	1.8	1.8	1.8
Front left diameter mm	180	180	180	180	180
Control Type	Electronic	Rotary	Rotary	Rotary	Rotary
Oven Features					
Cavities	Double	Double	Double	Double	Double
Programmer	•	•	•	•	•
Minute Minder with End Cook	•	•	•	•	•
Electronic Clock	•	•	•	•	•
Oven Lining	Catalytic	Catalytic	Catalytic	Catalytic	Catalytic
Oven Light	•	•	•	•	•
Viewing Window	•	•	•	•	•
Oven door(s)	Triple Glazed	Triple Glazed	Triple Glazed	Double Glazed	Double Glazed
Cooling fan	•	•	•	•	•
Chrome grid runners	•	•	•	•	•
Chrome auto-stop non-tip shelves	•	•	•	•	•
Grill/Meat pan	•	•	•	•	•
Electrical Connection					
Voltage	230/240	230/240	230/240	230/240	240
Frequency	50	50	50	50	50
Safety and interference suppression					
Low Voltage Directive (LVD)	•	•	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•	•	•
Appliance Dimension					
Width cm	60	60	60	60	55
Height cm	90	90	90	90	90
Depth cm	60	60	60	60	60
Energy Label Top oven / Main oven	AA	AA	AA	AA	AA
Packaging Dimensions					
Height mm	1020	1020	1020	1020	1020
Width mm	660	660	660	660	610
Depth mm	740	740	740	740	740
Gross weight Kg	64	64	64	61	58

Freestanding ovens

Model	EIKG6049XN*	EIKG6047* / EKG6046*	EIKG5547* / EIKG5546*
Fuel Type	Gas	Gas	Gas
OVEN FUNCTIONS (T=top, M=main)			
Grill	•	•	•
Open Burner	• •	• •	• •
Hob			
Type (Natural Gas)	Gas	Gas	Gas
Cooking Zones			
Left front (A)	Triple crown	Rapid	Rapid
Left rear (B)	Semi-rapid	Semi-rapid	Semi-rapid
Right front (E)	Auxiliary	Auxiliary	Auxiliary
Right rear (F)	Semi-rapid	Semi-rapid	Semi-rapid
Individual hob flame safety device	•	•	•
Pan Supports	Cast iron	Enamel	Enamel
Control Type	Rotary	Rotary	Rotary
Ignition Type	Mains	Mains	Mains
Oven Features			
Cavities	Double	Double	Double
Minute Minder with End Cook	•	•	•
Oven Lining	Catalytic	Catalytic	Enamel / Catalytic
Oven Light	•	•	•
Viewing Window	•	•	•
Oven door(s)	Triple Glazed	Double Glazed	Double Glazed
Cooling fan	•	•	•
Chrome grid runners	•	•	•
Chrome auto-stop non-tip shelves	•	•	•
Grill/Meat pan	•	•	•
Electrical Connection			
Voltage	230/240	230/240	230/240
Frequency	50	50	50
Safety and interference suppression			
Low Voltage Directive (LVD)	•	•	•
Electromagnetic Compatibility (EMC)	•	•	•
Appliance Dimension			
Width cm	60	60	55
Height cm	90	90	90
Depth cm	60	60	60
Packaging Dimensions			
Height mm	1020	1020	1020
Width mm	660	660	610
Depth mm	740	740	740
Gross weight Kg	66	65	61
Model	EIKM6047X*		
Fuel Type	Dual Fuel		
OVEN FUNCTIONS (T=top, M=main)	T M		
Ultrafan fan operated cooking	•		
Fan controlled defrosting	•		
Conventional cooking	•		
Full width/dual circuit electric grill1	•		
Hob			
Type (Natural Gas)	4 Burner Gas hob		
Cooking Zones			
Left front (A)	Triple crown		
Front left rating kWh	3.4		
Left rear (B)	Semi-rapid		
Rear left rating kWh	1.90		
Right front (E)	Auxillary		
Front right rating kWh	1		
Right rear (F)	Semi-rapid		
Rear right rating kWh	1.9		
Pan Supports	Cast iron		
Control Type	Rotary		
Ignition Type	Integral		
Oven Features			
Cavities	Double		
Programmer	•		
Minute Minder with End Cook	•		
Electronic Clock	•		
Oven Lining	Catalytic		
Oven Light	•		
Viewing Window	•		
Oven door(s)	Triple Glazed		
Cooling fan	•		
Chrome grid runners	•		
Chrome auto-stop non-tip shelves	•		
Grill/Meat pan	•		
Electrical Connection			
Voltage	230/240		
Frequency	50		
Safety and interference suppression			
Low Voltage Directive (LVD)	•		
Electromagnetic Compatibility (EMC)	•		
Appliance Dimension			
Width cm	60		
Height cm	90		
Depth cm	60		
Energy Label Top oven / Main oven	AA		
Packaging Dimensions			
Height mm	1020		
Width mm	660		
Depth mm	740		
Gross weight Kg	73.5		

* Fitted with gas safety thermocouples. Suitable for apartments and multi-occupancy dwellings.

Built-in fridges and freezers

Model	ERG23610	EUF14700	ERN34800	EUF23800	ERN16310
	In-column larder fridge	In-column Frost Free freezer	In-column larder fridge	In-column Frost Free freezer	In-column larder fridge
Fridge features					
Defrost	Auto		Auto		Auto
Set Electronic Controls					
Electronic temperature controls - LCD/LED display	•		•		
Intensive cooling	•		•		
Adjustable thermostat - coin/knob					Knob
Dairy compartment	•		•		•
Spill safe door shelves	•		•		•
Full width can shelves	2		3		1
Half width sliding shelf					
Bottle rack with grippers	•		•		•
Air circulation fan			•		
Glass shelves (full depth)	4		4		2
Glass shelves (half depth)	2		2		2
Flexible shelf positions	•		•		•
Wine/can rack					
Large telescopic drawer			•		
Full width transparent salad bin with					
2 half width hinged frosted plastic lids					
Full width transparent salad bin with					
2 half width hinged glass lids					
Full width transparent salad bin with frosted glass lid					•
2 half width salad bins with full width glass cover	•				
Humidity control (for salad crispers)					
Interior light	•		•		•
Egg container	•		•		•
Freezer features					
Frost Free		•		•	
Defrost - freezer		Auto		Auto	
Electronic temperature controls - LCD/LED display	•		•	•	
Intensive Freezing	•		•	•	
Adjustable thermostat - coin/knob					
On LED (Green)	•		•	•	
Intensive Freeze Push Button with automatic timed reset	•		•	•	
Intensive Freeze LED (Yellow)					
High temperature warning LED (Red)	•		•	•	
High temperature warning audible buzzer	•		•	•	
Door open warning LED (Red) and audible buzzer	•		•	•	
Freezer compartments (flap/drawers)	1/4		2/5		
Transparent/solid white freezer compartments	Transparent		Transparent		
Freezer calendar					
Ice cube tray	•		•		
Ice scraper					
Ice packs (accumulators)	2			2	
Other features					
Adjustable feet					
Reversible doors	•	•	•	•	•
100% CFC Free	•	•	•	•	•
100% HFC Free	•	•	•	•	•
Matching fridge/freezer	EUF14700	ERG23610	EUF23800	ERN34800	EUN12310
Fridge freezer split					
Energy efficiency information					
Energy efficiency class*	A+	A+	A+	A+	A
Energy consumption (kWh/year)**	131	232	145	307	153
Noise, IEC 704-3 dB(A)	33	38	34	38	38
Gross capacity fridge litres (cu.ft)	225		332 (11.7)		154 (5.4)
Net capacity fridge litres (cu.ft)	222		330 (11.6)		152 (5.3)
Gross capacity chill zones litres (cu.ft)					
Net capacity chill zones litres (cu.ft)					
Gross capacity freezer litres (cu.ft)		135 (4.8)		220 (7.8)	
Net capacity freezer litres (cu.ft)		122 (4.3)		208 (7.3)	
Frozen food rating		4 star		4 star	
Power cut safe hours***		24		21	
Freezing capacity (kg/24hours)		20		20	
Climate class****	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST
Electrical connection					
Connected load (W)	120	100	120	130	100
Fuse rating (amps)	13	13	13	13	13
Product dimensions					
Height (mm)	1219	1213	1772	1772	873
Width (mm)	556	540	540	540	540
Depth (mm)	550	547	547	547	549
Net weight (kg)	44	43.5	59.5	60.0	29
Built-in dimensions					
Built-in height (mm)	1225	1225	1780	1780	880
Built-in width (mm)	560	560	560	560	560
Built-in depth (mm)	550	550	550	550	550
Door fixing	Door on door	Door on door	Slider	Slider	Slider
Packaging information					
Height (mm)	1320	1300	1860	1860	925
Width (mm)	610	610	610	610	586
Depth (mm)	610	600	620	620	620
Gross weight (kg)	46	47.9	64.0	65.0	30.0

* Energy efficiency class based on a scale of A+ (most efficient) to G (least efficient)

** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located

*** Time for food temperature to rise from -18°C to -9°C with the power off and the door remaining closed

**** Climate class - the product is suitable for use in ambient temperatures of SN: 10°C-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

Built-in fridges and freezers

Model	EUN12310	ERN15310	ERU13510	EUF10810	ERU14410	EUU11410
	In-column freezer	In-column fridge with 4 star freezer	Under counter fridge with 4 star freezer	Frost Free Under counter freezer	Under counter larder fridge	Under counter freezer
Fridge features						
Defrost		Auto	Auto		Auto	
Set Electronic Controls with LCD display						
Intensive cooling						
Adjustable thermostat - coin/knob		Knob	Knob		Knob	
Dairy compartment		•	•		•	
Spill safe door shelves		•	•		•	
Full width can shelves	1					
Half width sliding shelf		•	•		•	
Bottle rack with grippers	•		•		•	
Air circulation fan						
Glass shelves (full depth)	1	1			2	
Glass shelves (half depth)	2	2			2	
Flexible shelf positions	•	•			•	
Wine/can rack						
Large telescopic drawer						
Full width transparent salad bin with 2 half width hinged frosted plastic lids						
Full width transparent salad bin with 2 half width hinged glass lids					•	
Full width transparent salad bin with frosted glass lid		•	•			
2 half width salad bins with full width glass cover						
Humidity control (for salad crispers)						
Interior light		•	•		•	
Egg container		•	•		•	
Freezer features						
Frost Free				•		
Defrost - freezer	Manual	Manual	Manual	Auto		Manual
Electronic temp. controls				Electronic		Electronic
Intensive Freezing				•		•
Adjustable thermostat - coin/knob				•		Knob
On LED (Green)	•			•		•
Intensive Freeze Push Button with auto timed reset	•			•		•
Intensive Freeze LED (Yellow)	•			•		•
High temperature warning LED (Red)	•			•		•
High temperature warning audible buzzer				•		•
Door open warning LED (Red) + audible buzzer				•		•
Freezer compartments (flap/drawers)	0/4	1/0	1/0	0/3		0/4
Transparent/solid white freezer compartments	Transparent	Solid White	Solid White	Transparent		Transparent
Freezer calendar						
Ice cube tray	•	•	•	•		
Ice scraper	•					•
Ice packs (accumulators)				2		
Other features						
Adjustable feet			•		•	•
Reversible doors	•	•	•	•	•	•
100% CFC Free	•	•	•	•	•	•
100% HFC Free	•	•	•	•	•	•
Matching fridge/freezer	ERN16310			ERU14410	EUU11410	ERU14410
Fridge freezer split						
Energy efficiency information						
Energy efficiency class*	A	A	A+	A	A	A
Energy consumption (kWh/year)**	208	231	175	215	151	210
Noise, IEC 704-3 dB(A)	36	38	35	40	35	38
Gross capacity fridge litres (cu.ft)		124	105 (3.7)		140 (4.9)	
Net capacity fridge litres (cu.ft)		118 (4.1)	100 (3.5)		136 (4.8)	
Gross capacity chill zones litres (cu.ft)						
Net capacity chill zones litres (cu.ft)						108 (3.8)
Gross capacity freezer litres (cu.ft)						
Net capacity freezer litres (cu.ft)	110 (3.9)	17 (0.6)	17 (0.6)	90 (3.2)		98 (3.5)
Frozen food rating	94 (3.3)	17 (0.6)	17 (0.6)	87 (3.1)		4 star
Power cut safe hours***	4 star	4 star	4 star	4 star		4 star
Freezing capacity (kg/24hours)	20	12	13	13		29
Climate class****	16	2	2.5	12		18
Electrical connection	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST
Connected load (W)	100	100	100	80	80	80
Fuse rating (amps)	13	13	13	13	13	13
Product dimensions						
Height (mm)	873	873	815-885	815	815-885	815-885
Width (mm)	540	540	596	596	596	596
Depth (mm)	547	549	550	550	550	550
Net weight (kg)	33.5	32.0	37.0	35.0	34.0	38.0
Built-in dimensions						
Built-in height (mm)	880	880	820-890	820	820-890	820-890
Built-in width (mm)	560	560	600	600	600	600
Built-in depth (mm)	550	550	550	550	550	550
Door fixing	Slider	Slider	Door on door	Door on door	Door on door	Door on door
Packaging information						
Height (mm)	960	925	880	880	880	880
Width (mm)	600	586	640	640	640	640
Depth (mm)	620	620	620	620	620	620
Gross weight (kg)	36.0	33.0	38.0	36.0	35.0	39.0

* Energy efficiency class based on a scale of A+ (most efficient) to G (least efficient)
** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located
*** Time for food temperature to rise from -18°C to -9°C with the power off and the door remaining closed
**** Climate class - the product is suitable for use in ambient temperatures of SN: 10°C-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

Built-in fridge freezers

Models	ENN26800	ENN28600	ERN29600	ERN28700	ERN28600
	50:50	70:30	70:30	50:50	50:50
	Total No Frost fridge freezer	Frost Free fridge freezer	Fridge freezer	Fridge freezer	Fridge freezer
Fridge features					
Defrost	Auto	Auto	Auto	Auto	Auto
SET Electronic Controls		•			
Electronic temperature controls with LCD display	•				
Intensive cooling	•				
Adjustable thermostat (coin/knob)		Knob	Knob	Knob	Knob
Dairy compartment	•	•	•	•	•
Spill safe door shelves	•	•	•	•	•
Full width can shelves	1	2	2	1	1
Half width sliding shelf	1				
Bottle rack with grippers	•	•	•	•	•
Air circulation fan	•				
Glass shelves (full depth)	2	3	3	2	2
Glass shelves (half depth)	2	2	2	2	2
Flexible shelf positions	•	•	•	•	•
Full width transparent salad bin with frosted glass lid					
2 half width salad bins with full width glass cover	•	•	•	•	•
Interior light	•	•	•	•	•
Egg container	•	•	•	•	•
Freezer features					
Frost Free	•	•			
Defrost - freezer	Auto	Auto	Manual	Manual	Manual
Electronic temperature controls/LCD display	•				
On LED (Green)	Display	•			
Intensive Freeze Push Button with automatic timed reset	•	•			
Intensive Freeze function	•	•			
Intensive Freeze LED (Yellow)	Display	•			
High temperature warning LED (Red)	Display				
High temperature warning audible buzzer	•				
Freezer compartments (flap/drawers)	0/4	0/3	0/3	0/4	0/4
Transparent/solid white freezer compartments	Transparent	Transparent	Transparent	Transparent	Transparent
Freezer calendar	•	•	•	•	•
Ice cube tray	•	•	•	•	•
Ice scraper					
Ice packs (accumulators)	2		2	2	
Other features					
Reversible doors	•	•	•	•	•
100% CFC Free	•	•	•	•	•
100% HFC Free	•	•	•	•	•
Fridge freezer split	50:50	70:30	70:30	50:50	50:50
energy efficiency information					
Energy efficiency class*	A	A	A+	A+	A
Energy consumption (kWh/year)**	335	314	296	285	321
Noise, IEC 704-3 dB(A)	38	38	36	36	36
Gross capacity fridge (litres (cu.ft))	164 (5.8)	214 (7.6)	214 (7.6)	173 (6.1)	173 (6.1)
Net capacity fridge (litres (cu.ft))	162 (5.7)	210 (7.4)	210 (7.4)	170 (6.0)	170 (6.0)
Gross capacity freezer (litres (cu.ft))	91 (3.2)	68 (2.4)	76 (2.7)	110 (3.9)	110 (3.9)
Net capacity freezer (litres (cu.ft))	78	55 (1.9)	70 (2.5)	92 (3.3)	92 (3.3)
Frozen food rating	4 star	4 star	4 star	4 star	4 star
Power cut safe hours***	25	13	24	18	18
Freezing capacity (kg/24hours)	10	4	4	10	10
Climate class****	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST
Electrical connection					
Connected load (W)	160	160	120	160	160
Fuse rating (amps)	13	13	13	13	13
Product dimensions					
Height (mm)	1772	1772	1772	1772	1772
Width (mm)	540	540	540	540	540
Depth (mm)	547	547	547	547	547
Net weight (kg)	59.5	57.5	57.0	57.5	57.5
Built-in dimensions					
Built-in height (mm)	1780	1780	1780	1780	1780
Built-in width (mm)	560	560	560	560	560
Built-in depth (mm)	550	550	550	550	550
Door fixing	Slider	Slider	Slider	Slider	Slider
Packaging information					
Height (mm)	1850	1860	1860	1860	1860
Width (mm)	600	610	610	610	610
Depth (mm)	620	620	620	620	620
Gross weight (kg)	64.0	62.0	62.0	62.0	62.0

Dishwashing

Model	ESL43010	ESL46010	ESL2450W
Controls			
Format	Slim Fully Integrated	Slim Fully Integrated	Compact
Capacity (number of IEC place settings)	9	9	6
Electronic	Electronic	Electronic	Electronic
Number of programmes	5	5	4
Number of temperature options	4	4	3
Programmes			
Intensive 70°C	•	•	•
Normal 65°C wash	•		
Quick 60°C (30 minute) 'A' wash - reduced load	•	•	
AUTO programme		•	•
ECO 50°C wash	•	•	
ECO 55°C wash			•
Quick 50°C wash			•
Glass Care 45°C wash		•	
Rinse & hold			
Controls	Push	Push	Push
Visible Control Panel			
Display		3 digit	•
Options			
Multitab		•	
Auto half load	•	•	
Delay Start		•	•
Dishwashing features			
Residual heat drying	•		•
Active condenser drying		•	
Upper basket height Adjustable		•	
Cupshelves	2 plastic	1 fixed 2 plastic	2 plastic
Lower basket plate racks			
Lower basket handles			
Folding rack	Fixed	2	
Cutlery basket	•	•	•
Salt indicator	•	•	•
Automatic rinse aid		•	
End of programme indicator	Buzzer	Buzzer	•
Wine Glass Holder			
Internal Light			
Installation features		•	•
Flood protection switch			
Inlet Hose	Standard	Aquastop	Pex
Cold water fill	•	•	•
Water pressure min/max (bar)	0.5/8	0.5/8	0.8/10
Worktop steam protection	Aluminium	Aluminium	Plastic
Top & side fixing brackets	•	•	•
Recessed plinth	•	•	
Height adjustable feet	•	•	•
Energy efficiency information			
Energy efficiency class***	A	A	A
Energy consumption (kWh)*	0.80	0.80	0.63
Wash performance**	A	A	A
Drying performance***	B	A	B
Noise dBa (average)	51	47	45
Programme time (mins)*	130	160	150
Water consumption (litres/cycle)	14	13	7
Average annual energy consumption (kWh/year)**	176	176	138.6
Average annual water consumption (litres/year)**	3080	2860	1540
Electrical connection			
Connected load (kW)	2.2	2.2	1.08
Fuse rating (amps)	13	13	13
Dimensions - see page 136 for installation diagrams			
Width (mm - A)	446	446	545
Height (mm - B)	818	818	447
Depth (mm - C)	550	550	494
Furniture door dimensions			
Height (mm)	644-714	644-714	460^
Width (mm)	446	446	596^
Weight (kg)	2.0 - 6.0	2.0 - 6.0	2.0 - 5.0
Control panel colour			
White			•
Black	•	•	
Stainless steel			
Glass/Stainless steel			
Packaging dimensions			
Height (mm)	910	910	505
Width (mm)	500	500	605
Depth (mm)	680	680	595
Net Weight (kg)	31	33.8	21.7
Gross Weight (kg)	33	35.3	23.5

* Energy consumption is stated in kWh per standard test cycle, using cold water fill. Actual consumption will depend on how the appliance is used.
** Estimated annual consumption based on 220 washing cycles.
*** Models with an 'A' rated classification offer a higher performance than those with a 'G' rating.
^ Stainless steel door ELXMIDIX optional accessory

Laundry


Model	EWG14750W	EWG12450W	EWX14450W	EWX12550W
Typology	Washer	Washer	Washer Dryer	Washer Dryer
Wash system	Direct Spray	Aqualux	Aqualux	Direct Spray
Wash capacity (kg)	6	6	6	6
Dry capacity (kg)			4	4
Spin speed (rpm)	1400	1200	1400	1200
Controls				
LCD Display	Large	•	•	•
Electronic controls	•	•	•	•
Rotary controls	1	1	1	1
Push buttons	8	8	8	8
Programme progress LEDs	•	•	•	•
Delay Timer	•	•	•	•
Display for programme time, delay time and countdown to programme end	•	•	•	•
Programmes				
Cotton	•	•	•	•
Cotton with prewash	•	•	•	•
Cotton economy	•	•	•	•
Cotton economy with prewash	•	•		
Synthetics	•	•	•	•
Synthetics with prewash	•	•		
Synthetics easy iron			•	•
Delicate	•	•	•	•
Lingerie	•	•		
Silk	•	•	•	•
Handwash	•	•	•	•
Wool	•	•	•	•
Cotton dry			•	•
Synthetic dry			•	•
Rinses	•	•	•	•
Drain	•	•	•	•
Spin	•	•	•	•
Options				
Time manager (adjustable wash time)	•	•	•	•
Temperature selection	•	•	•	•
Easy ironing	•	•		
Spin Speed reduction/rinse hold	•	•	•	•
Drying time			•	•
Extra Rinse	•	•	•	•
Half Load	Auto	Auto	Auto	Auto
Features				
Large Porthole	•	•	•	•
Wide door opening	•	•	•	•
EU Energy Efficiency Information				
Wash/spin only				
Energy Class (wash/spin only) (1)	A+	A+		
Energy consumption (2 (kWh/cycle)	1.02	1.02	1.02	1.02
Average annual energy consumption (4 (kWh/year)	204	204	204	204
Water consumption (2 (litres/cycle)	42	45	45	42
Average annual water consumption (4 (litres/year)	8400	9000	9000	8400
Washing programme time (2 (mins)	145	155	155	145
Washing performance (A-G) (2)	A	A	A	A
Spin efficiency (A-G) (2)	B	B	B	B
Water extraction efficiency (%)	51	53	49	53
Wash/spin/dry - always using the dryer				
Energy Class (wash/spin dry) (1)			B	C
Energy consumption3 (kWh/cycle)			4.85	5.58
Average annual energy consumption (5 (kWh/year)			970	1116
Water consumption (3 (litres/cycle)			87	88
Average annual water consumption (5 (litres/year)			17400	17600
Washing programme time (3 (mins)				
Washing performance			A	A
Electrical and water connection				
Voltage/frequency (Volts/Hz)	240/50	240/50	240/50	240/50
Connected load (Watts)	2050	2050	2050	2050
Fuse rating (A)	13	13	13	13
Water fill	Cold	Cold	Cold	Cold
Appliance dimensions				
Height (mm)	820	820	820	820
Width (mm)	600	600	600	600
Depth (mm)	541	541	541	541
Net Weight (kg)	64.9	63.9	68.9	67.4
Built in dimensions*				
Built-in height (mm)	825	825	825	825
Built-in width (mm)	600	600	600	600
Built-in depth (mm)	600	600	600	600
Packaged dimensions				
Height (mm)	900	900	900	900
Width (mm)	640	640	640	640
Depth (mm)	650	650	650	650
Gross weight (kg)	67.5	66.5	71.5	70

(1 Models with 'A+' rated classification offer a higher performance than those with a 'G' rating.
(2 Based on standard test results for a 60°C cotton cycle.
(3 Based on standard test results for 60°C cotton cycle and dry cotton drying cycles.
(4 Average annual consumption for a 4 person household based on 200 standard 60°C cotton cycles.
(5 Average annual consumption for a 4 person household based on 200 standard 60°C cotton cycles always using a dryer.

Installation diagrams


Single Ovens – see page 92-93 for product dimensions

Model numbers: EOC69400 EOB66714 EOC68000 EOC65140 EOB63100 EOB63000 EOB53000 EOB510000 EOG10000

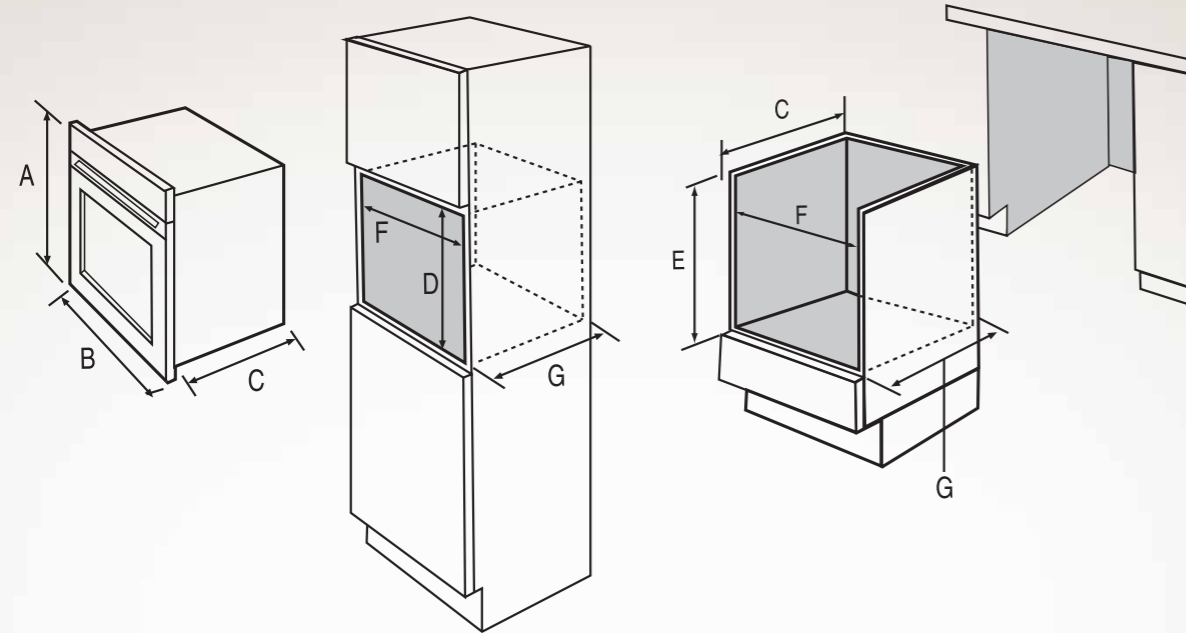


Double Ovens and Single Ovens with separate grill – see page 92-94 for product dimensions

Model numbers: EOD68043 EOD67043 EOD43103 EOD33003

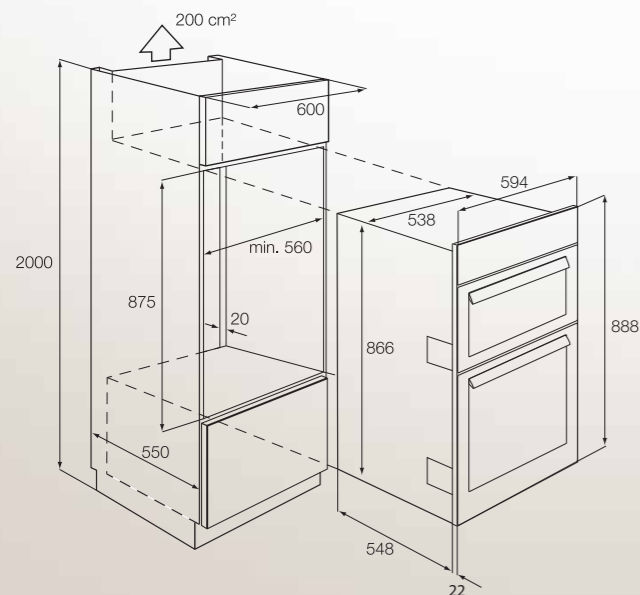


Built-Under Ovens – see page 95 for product dimensions

Model numbers: EOU63143 EOU43003 EOU33003

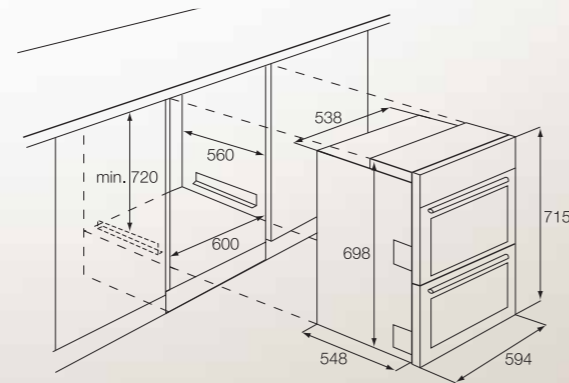


Microwaves – see page 96 for product dimensions


Model number: EMC38915

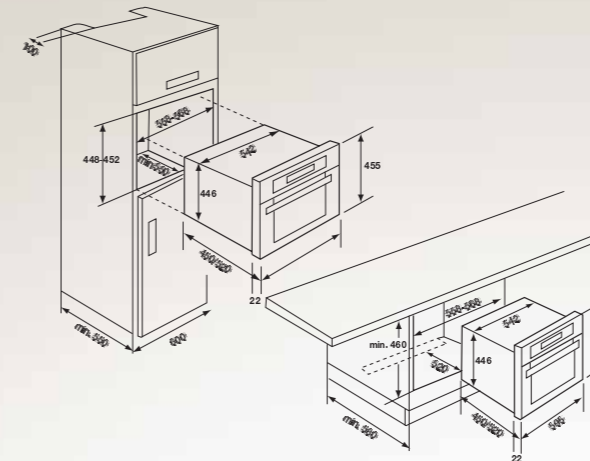


Model number: EMS26415

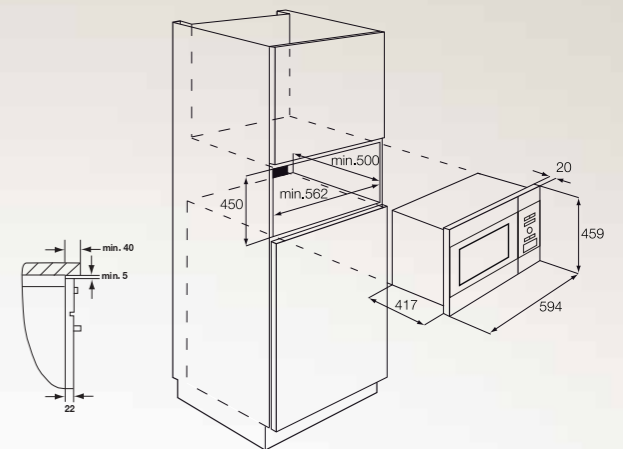

Model numbers: EMS17216X

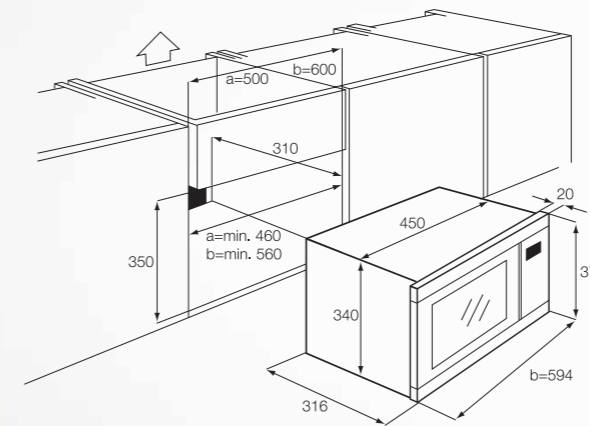


EMS17216X (in-column 17ltr)

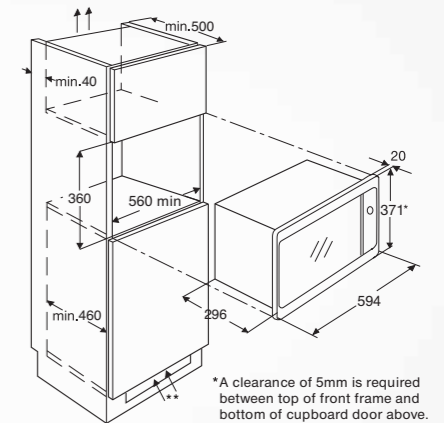



Compact ovens – see page 97 for product dimensions

Model numbers: EOK86030 EOK66030

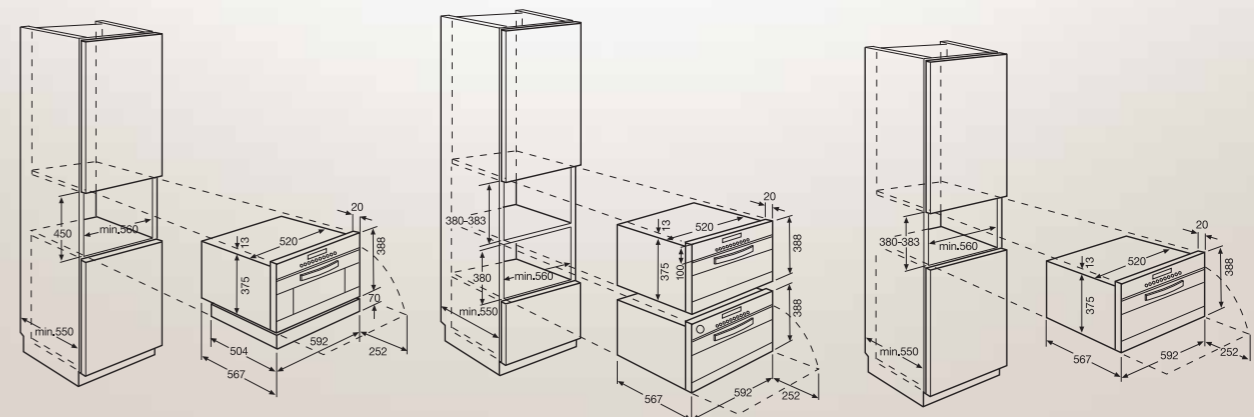


Integrated TV

Model number: ETV45000

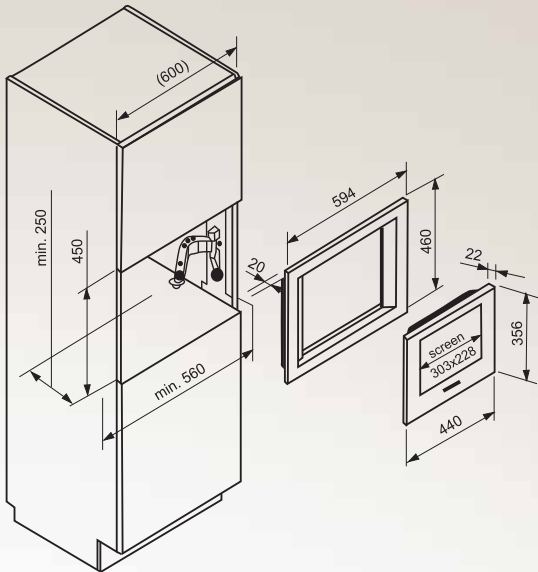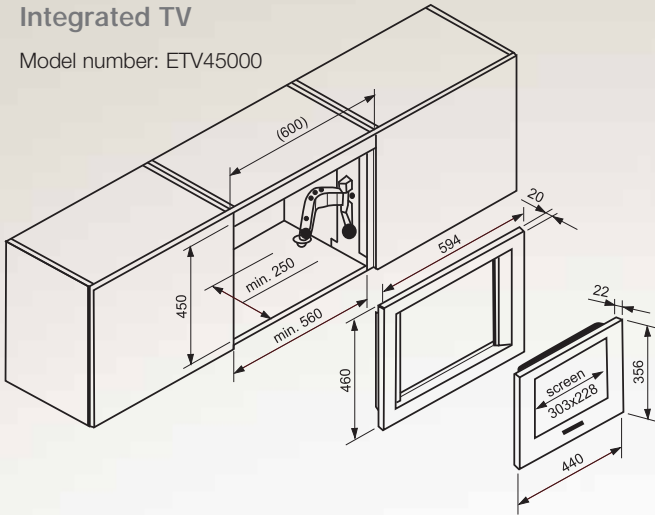


Coffee maker – see page 98 for product dimensions

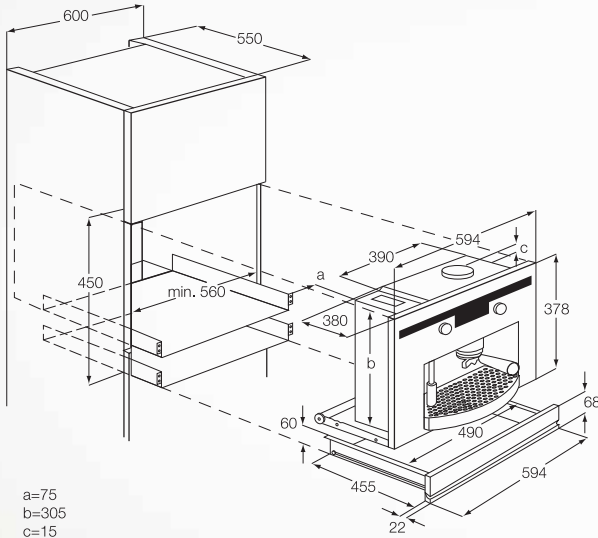

Hobs – see pages 99-100 for product dimensions




Model numbers: EHG90932 EHG75932
EHG9832 EHG7822
EHG6832 EHT6432 EHG641
EHD72100 EHD60020
EHS60210 EHS60021
EHP60060 EHP60040

(Please refer to spec table for required aperture dimensions).

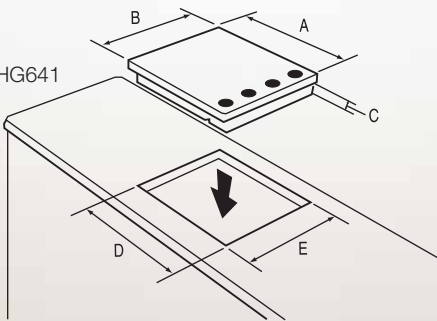


Warming drawers

Model number: EED14600X EED21600X EED29600X

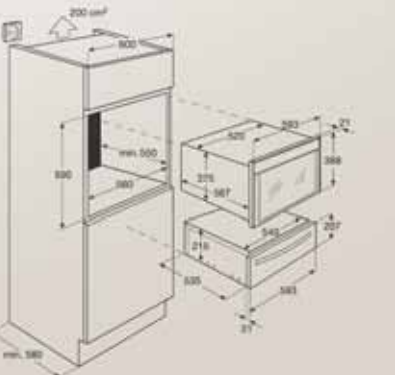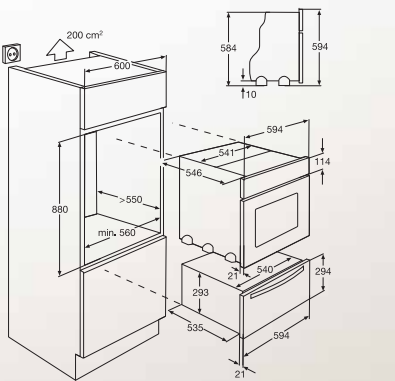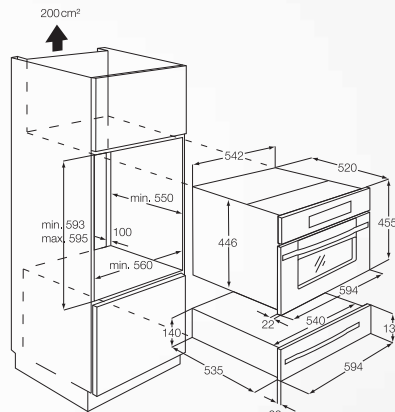


Cooker hoods – see page 101-103 for product dimensions

Model number: EFC90680

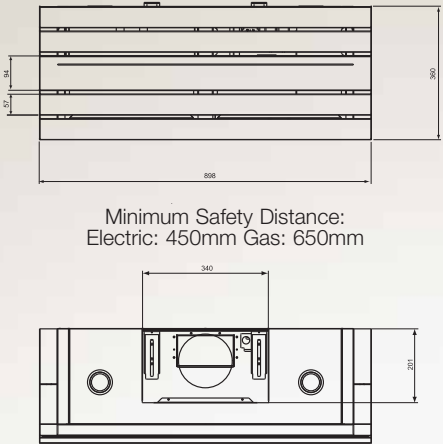


Model number: EFC9441 EFC6441

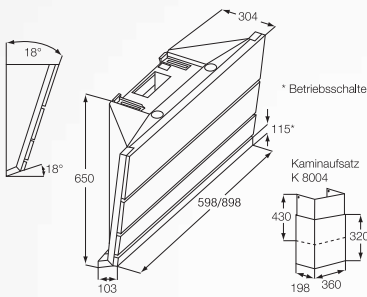


Minimum Safety Distance:
Electric: 400mm Gas: 400mm

Model number: EFC90950

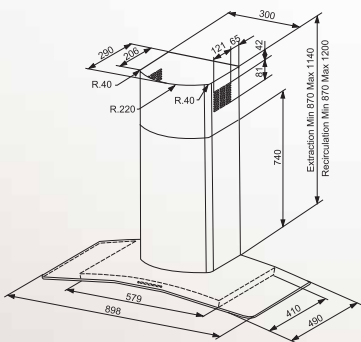


Minimum Safety Distance:
Electric: 500mm Gas: 650mm

Model number: EFC70700 EFC90700*



Minimum Safety Distance:
EFC90700 Electric: 600mm Gas: 700mm
EFC70700 Electric: 600mm Gas: 650mm


Model number: EFC90673

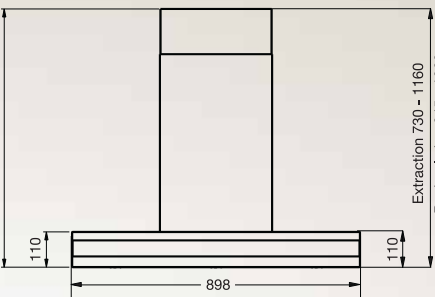

Depth 450mm


Minimum Safety Distance:
Electric: 500mm Gas: 650mm

Model number: EFC9540 EFC7540 EFC6540

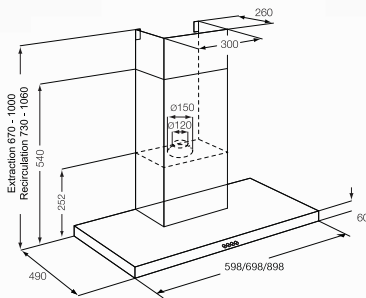


Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Model number: EFC90244 EFC60244




Minimum Safety Distance:
Electric: 500mm Gas: 650mm

Model number: EFC9430X

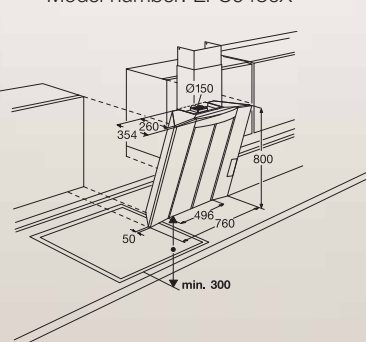


Minimum Safety Distance:
Electric: 300mm Gas: 300mm

Model number: EFA90950

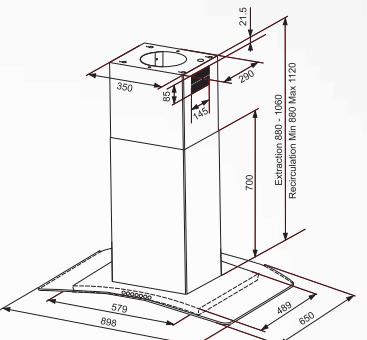

Minimum Safety Distance:
Electric: 650mm Gas: 650mm


Model number: EFC70710

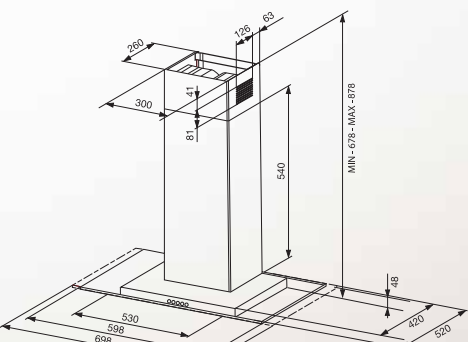

Minimum Safety Distance:
Electric: 650mm Gas: 650mm


Cooker hoods – see page 101-103 for product dimensions

Model number: EFC60001 EFC70001 EFC90001




Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Model number: EFP60032

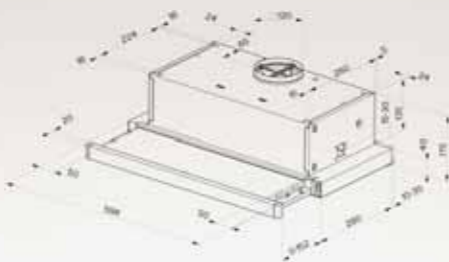


Minimum Safety Distance:
Electric: 500mm Gas: 650mm

Model number: EFG70023

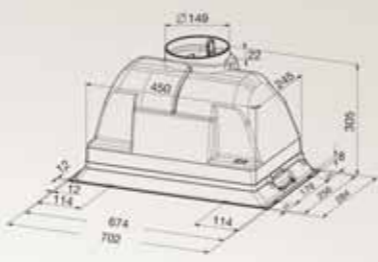


Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Model number: EFG50022 EFG50021

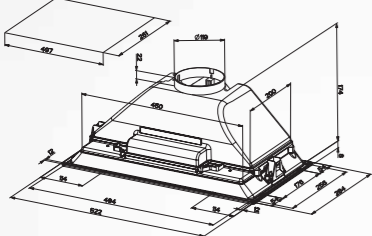

Total Height: 204mm
Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Model numbers: EFi60011 EFi60012 EFi60013



Minimum Safety Distance:
Electric: 500mm Gas: 700mm

Model number: EFT60003



Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Model numbers: EFT60004




Minimum Safety Distance:
Electric: 650mm Gas: 650mm

Splashbacks EFB60, EFB90,




Splashbacks EFB175, EFB975, EFB675



Ducting Kits


CDK5FR

120mm (5") diameter ducting kit for ducting of all hoods situated away from exterior wall. Up to 3 metres length. 100mm (4") reduction collar included. For use with Electrolux hoods.




CDK5F

120mm (5") diameter flexible ducting kit. 100mm (4") reduction collar included. For use with all Electrolux hoods for ducting up to 1 metre.




CDK6FR

150mm (6") diameter ducting kit for ducting of all hoods situated away from exterior wall. Up to 3 metres length. For use with Electrolux hoods.




Cooling & Freezing – see pages 107-110 for product dimensions

Model numbers: ERU13510 EUU11410 ERU14410 EUF10810

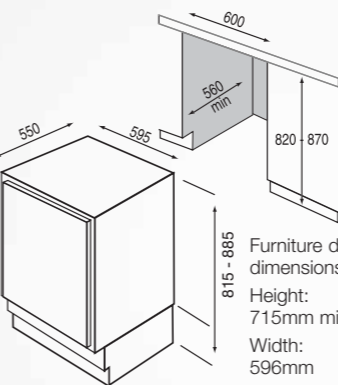


Furniture door dimensions
Height: 715mm min.
Width: 596mm
Thickness: 20mm max

Model numbers: ERN16310 EUN12310 ERG23610 ERN15310 EUF14700*

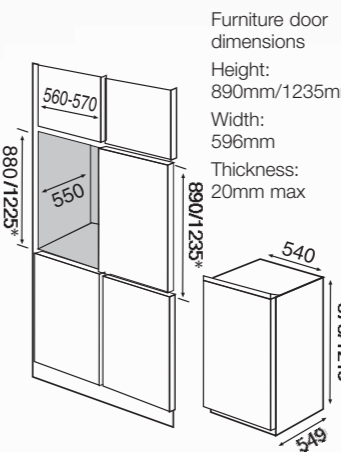


Furniture door dimensions
Height: 890mm/1235mm*
Width: 596mm
Thickness: 20mm max

Model numbers: ERN34800 EUF23800

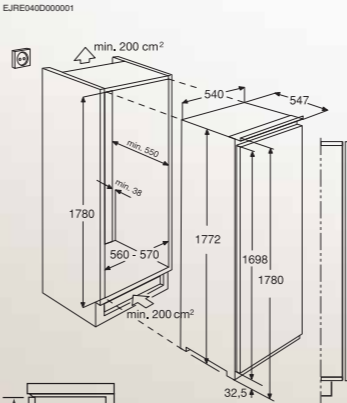


Furniture doors dimensions
Height: 1790mm
Width: 596mm
Thickness: 20mm max

Model numbers: ERN28600 ERN28700 ENN26800



Furniture doors dimensions
Height (top door): 860mm
(bottom door): 900mm
Width: 596mm
Thickness: 20mm max

Model numbers: ERN29600 ENN28600






Furniture doors dimensions
Height (top door): 1085mm
(bottom door): 710mm
Width: 596mm
Thickness: 20mm max

Dishwashing – see page 111-112 for product dimensions

Model numbers: ESI66010 ESL66010
ESL63010

Fully integrated compact dishwasher
ESL2450

Slimline dishwasher model numbers:
ESL46010 ESL43010

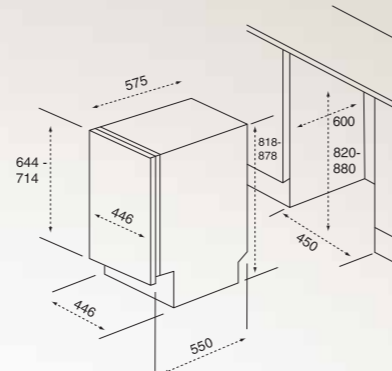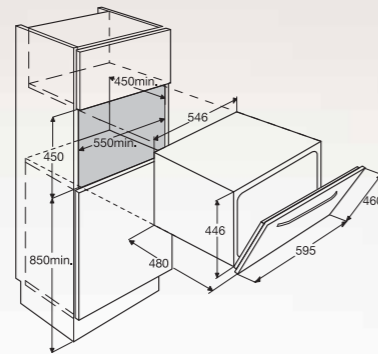
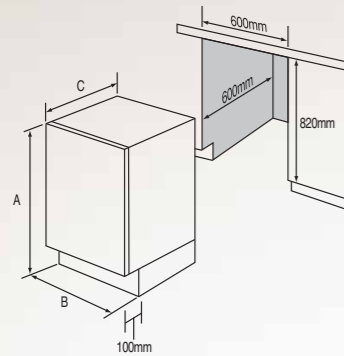


Laundry – see page 113 for product dimensions

Integrated laundry

EWG14750 EWG12450W
EWX14450W EWX12550W

Furniture Hinge positions

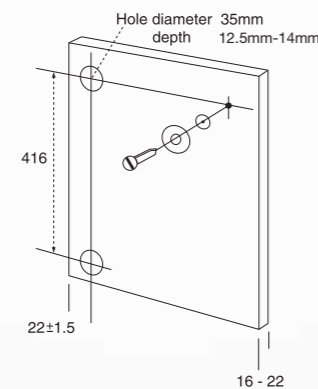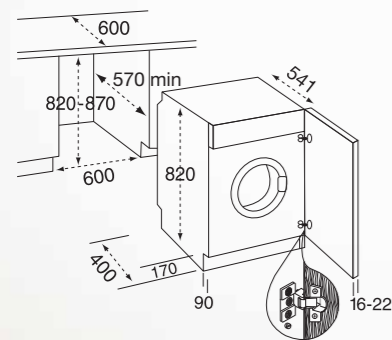

Notes

[illegible]

EU Energy Efficiency Information

This scheme, which covers refrigerators, freezers, washing machines, tumble dryers, dishwashers and electric ovens is designed to offer consumers a standardised method of choosing the most energy efficient appliances.

For refrigerators and freezers, as well as stating the Energy Efficiency Class ('A+' - most efficient, 'G' - least efficient) the label also gives the annual electricity consumption (i.e. running cost) and the usable storage capacity.

For washing machines the label also states the wash performance and spin efficiency. Three ratings are given to ensure energy efficiency combined with effective washing and drying. For dishwashers the label states energy efficiency, washing and drying performance.

For electric ovens the label also states the energy consumption (in kWh) and the usable volume of the oven. If the oven is a double oven it will carry this information for both ovens.

A

B

C

D

E


F

G


appliance with low energy consumption

appliance with medium energy consumption

appliance with high energy consumption



Many products in the Electrolux range are 'A' rated and endorsed by the Energy Savings Trust with an energy Efficiency Recommendation. The award by this independent body is made only to the most energy efficient appliances on the market.

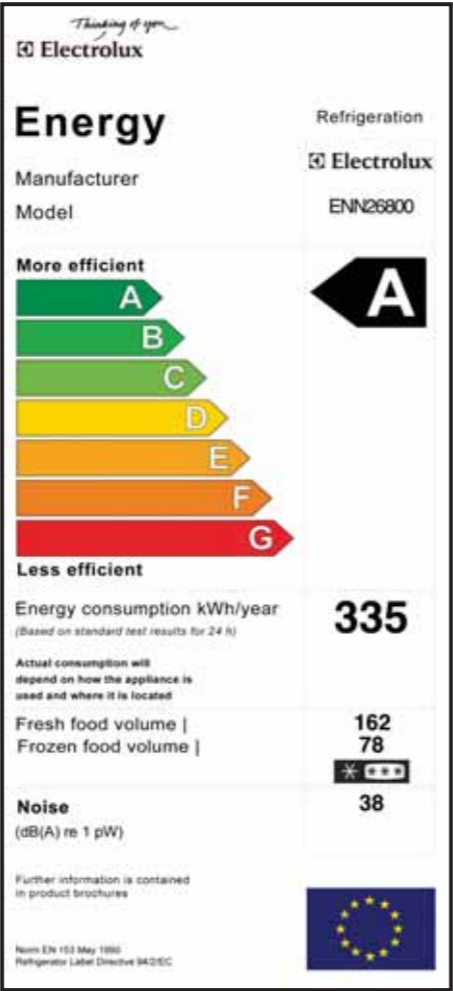

Customer Care telephone (08705) 950 950

Responsive customer care/after-sales service
Once you've bought an Electrolux appliance you're safe in the knowledge that in the unlikely event of a fault occurring you can rely on a commitment to look after your appliance throughout its working life. Our network of fully trained service engineers are available nationwide and our complete care service is one of the most extensive and reliable available.

12 months parts and labour guarantee.*
In the unlikely event of any repairs being required in the first year, we will carry them out free of charge. In addition, any repairs carried out after the guarantee period are covered by their own 12 months guarantee.

*Guaranteed conditions provided on request.

Rapid service.
If you call us out under the 12 months guarantee, we endeavour to fix the appliance within seven working days of our first call.

Local service nationwide.
Backed by the extensive range of spare parts held by our central warehouse, the Service Force Network will endeavour to repair your product in your home within 72 hours of receipt of the original call.*

*Excludes Saturdays, Sundays and Bank Holidays. and may not be available in rural or outlying areas.



Electrolux recommend the Ariel Range for outstanding cleaning and fabric care.

Service by appointment.
To allow you to plan your day we can offer an appointment within a 3 hour time period, when the call is booked two days in advance.* We can also provide service outside of office hours and Saturday mornings**

* Please note. The service pledge does not apply to the Republic of Ireland.
** A small extra charge is payable for this service.



Service Force network. Telephone (08705) 929 929
www.serviceforce.co.uk
Marketing Policy: The policy of Electrolux Major Appliances is one of continued improvement. We therefore reserve the right to alter or amend product ranges, specifications and dimensions without notice.

All specifications/dimensions including installation dimensions should be checked with the appropriate instruction booklet before use or installation. If in doubt, contact your local Electrolux stockist who regularly receives up-to-date product information from our marketing department. E and O.E



Only Finish detergent products are recommended for use in the Electrolux range of dishwashers, for exceptional cleaning performance.

ELECTROLUX MAJOR APPLIANCES

Addington Way, Luton, Bedfordshire LU4 9QQ

Telephone: (08705) 950 950

Website: www.electrolux.co.uk

Registered in England No. 2331516

ELECTROLUX IRELAND

Long Mile Road, Dublin 12

Website: www.electrolux.co.uk

Registered in Ireland No. 9118

Registered office: Long Mile Road, Dublin 12

PN: 506009526001

The Thoughtful Design Innovator.

Do you remember the last time you opened a gift that made you say "Oh! How did you know? That's exactly what I wanted!" That's the kind of feeling that the designers at Electrolux seek to evoke in everyone who chooses or uses one of our products. We devote time, knowledge, and a great deal of thought to anticipating and creating the kind of appliances that our customers really need and want.

This kind of thoughtful care means innovating with insight. Not design for design's sake, but design for the user's sake. For us, thoughtful design means making appliances easier to use and tasks more enjoyable to perform, freeing our customers to experience that ultimate 21st century luxury, ease of mind. Our aim is to make this ease of mind more available to more people in more parts of their everyday lives, all over the world. So when we say we're thinking of you, you know we mean just that.

Electrolux. Thinking of you.

Share more of our thinking at www.electrolux.co.uk

Brochure valid from June 2009 - 31 March 2010